

EOS Compact | model range

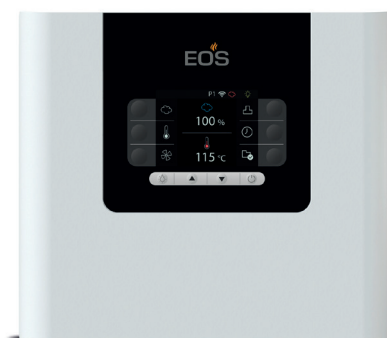
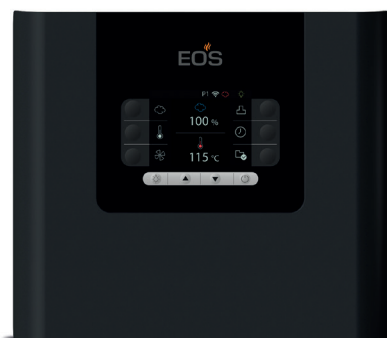


image similar

	DP	HP	DC	HC
Temperature range	30 - 115 °C (dry mode)	30 - 115 °C (dry mode) 30 - 70 °C (humid mode)	30 - 115 °C (dry mode)	30 - 115 °C (dry mode) 30 - 70 °C (humid mode)
Heating time limitation	6, 12, 18, ∞ h	6, 12, 18, ∞ h	6, 12, 18, ∞ h	6, 12, 18, ∞ h
Light output	yes	yes	yes, dimmable	yes, dimmable
Fan output	yes	yes	yes, 2 settings	yes, 2 settings
Temperature sensor	included, 2 m cable	included, 2 m cable	included, 2 m cable	included, 2 m cable
Bench and combi sensor	-	-	optional	optional
Display	Large 3.5" TFT colour display	Large 3.5" TFT colour display	Large 3.5" TFT colour display	Large 3.5" TFT colour display
Clock	yes	yes	yes	yes
Timer	yes, once 24 h	yes, once 24 h	yes, once 24 h	yes, once 24 h
Keypad lock	yes	yes	yes	yes
Holiday home mode	yes	yes	yes	yes
Extension modules (Remote- start/ -HOT/ -ECO, KNX / MODBUS)	-	-	yes (optional modules)	yes (optional modules)
User profiles	4, with pre-sets	4, with pre-sets	4, with pre-sets	4, with pre-sets
Switching capacity	10 kW, extendable	10 kW, extendable	10 kW, extendable	10 kW, extendable
Power supply	400 V 3N AC 50Hz	400 V 3N AC 50Hz	400 V 3N AC 50Hz	400 V 3N AC 50Hz
Size (HxWxD)	220 x 255 x 65 mm	220 x 255 x 65 mm	220 x 255 x 65 mm	220 x 255 x 65 mm
Item no. (anthracite/arctic white)	94.7431 / 94.7427	94.7432 / 94.7428	94.7433 / 94.7429	94.7434 / 94.7430